



DI8-DC

- 1° 12V, 24V or 48V DC input voltage only
- 2° Conductor cross-section 0.14 - 1 mm²

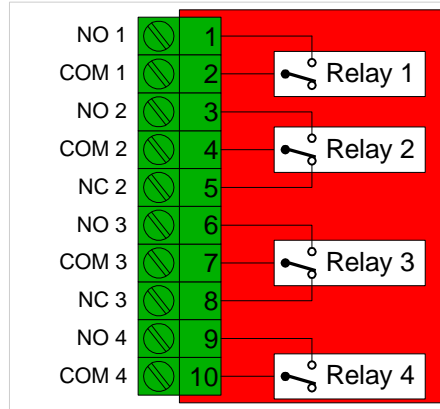

DO4-PR

- 1° Conductor cross-section 0.14 - 1 mm²
- 2° Maximum 6A (resistive) for each contact or 1A for inductive load
- 3° Only 1 wire/contact

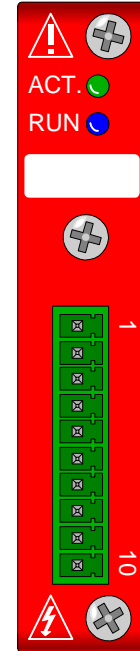

Front Panel

Horizontal Plug-In 10 poles:

Euroclamp: SH10-3.5

Phoenix: 1840447 (MC1,5/10-G-3,5)